

## High Efficient Aperture coupled patch antenna without metamaterial and with metamaterial using CSRR

Parth Bhasker<sup>1</sup>, Utkarsh Shah<sup>2</sup>

<sup>1</sup> PG Student EC Department PIET, Limda, Vadodara, Gujarat

<sup>2</sup> Assistant Professor EC Department PIET, Limda, Vadodara, Gujarat

<sup>1</sup> parth.bhasker1001@gmail.com

<sup>2</sup> utkarsh.piet@gmail.com

---

**Abstract:-** Microstrip patch antenna with metamaterial properties has become a very wide topic in recent eras. Due to its flexible structure patch antennas has proven itself in various parameters (i.e. efficiency, gain, bandwidth). This paper concentrates on an aperture coupled feeding technique with and without metamaterial. The proposed antenna is designed for the frequency 2.45 GHz using Complementary Split Ring Resonator structure (CSRR). The performance of the antenna can be viewed by calculating various parameters like S11, Polar plot and Efficiency using CST. The simulations results prove that the efficiency gets increased with the metamaterial structure.

**Keywords:-** Microstrip patch antenna, Metamaterial, Efficiency.

---

### I. INTRODUCTION


In recent days Microstrip Patch Antenna (MPA) has increasing demand in the field of RF. This is due to its various advantages like low weight, low profile, cheap, easy to fabricate etc. There are many feeding techniques but for capacitive coupling, we use aperture coupled feeding technique. Dealing with this type of feeding also increases radiation pattern and increased bandwidth. Aperture coupled is different than other coupling in the terms of feed and substrate, also ground is in between two substrates and one slot is implemented in ground which works like bridge between feed and patch. Different substrate thickness leads to better efficiency and increased bandwidth [1, 2].

As metamaterials is such a kind of material which exhibit electromagnetic properties generally not found in nature. The main purpose of using this kind of material is that it has a negative permittivity and permeability property which is sometimes referred as negative refractive index medium. The concept of this kind of material was first performed by Veselago[3]. In this medium group velocity and phase velocity are antiparallel to each other, where group velocity moves in the forward direction whereas the phase velocity moves backward and this backward waves propagate in Left handed Material [4]. In real world we cannot obtain metamaterial but we can obtain its properties by using different structures which is being followed by various researchers. And this common structures are Split Ring Resonator (SRR) and Complimentary Split Ring Resonator [5, 6]. This paper investigate and compare two methods to improve efficiency of the antenna. The first one is the general aperture coupled antenna. The second one is to investigate the same aperture coupled antenna but with the metamaterial structures.

### II. APERTURE COUPLED MICROSTRIP ANTENNA DESIGN

As the aperture coupled feeding technique has an advantage of large bandwidth and high radiating efficiency.

All the dimensions of the antenna is calculated using the formulas which is mentioned below [2]. Fig. 1 shows the design of the aperture coupled antenna with the patch dimension as 36mm\*30mm, thickness of both the substrates is 1.6mm, the dimensions of aperture are 2.5mm\*11mm, also the substrate material used is FR4 and the dimensions of substrate and ground plane are 45.6mm\*49.6mm.

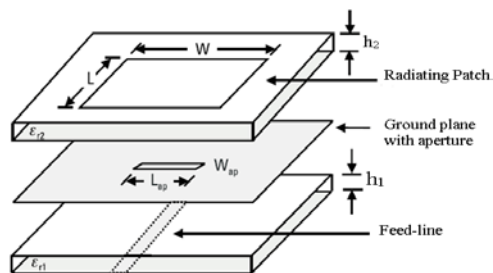

**Fig 1. Aperture coupled microstrip antenna**

**Width of metallic patch (W)**

$$W = \frac{1}{2fr\sqrt{\mu_0\epsilon_0}} (\sqrt{2} \sqrt{\epsilon_r + 1}) \frac{v_0}{2fr} (\sqrt{2} \sqrt{\epsilon_r + 1}) \dots (1)$$

Where,  $v_0$  = free space velocity of light  
 $\epsilon_r$  = Dielectric constant of substrate  
 $\epsilon_0$  = Dielectric constant of Air

**Effective dielectric constant is calculated from Length of metallic patch (L)**

$$L = L_{eff} - 2\Delta L \dots (2)$$


where

$$L_{eff} = \frac{1}{2fr\sqrt{\epsilon_{eff}}} \left( \frac{\epsilon_0 \mu_0}{\epsilon_{eff}} \right)$$

**Calculation of Length Extension**

$$\frac{\Delta L}{H} = \frac{(0.412)(\epsilon_{eff} + 0.3) \left( \frac{W}{H} + 0.264 \right)}{(\epsilon_{eff} - 0.258) \left( \frac{W}{H} + 0.8 \right)} \dots (4)$$

The best result of return loss is shown in the fig. 2. A return loss of -11.36db at center frequency 2.50 GHz is achieved. Fig. 3 and fig. 4 illustrate the graph of polar plot and Efficiency.

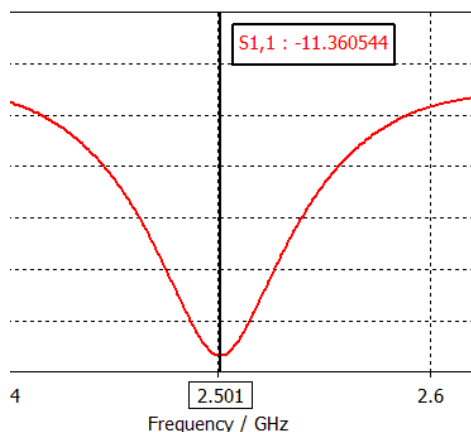

**Fig 2. S11 of Aperture coupled antenna**

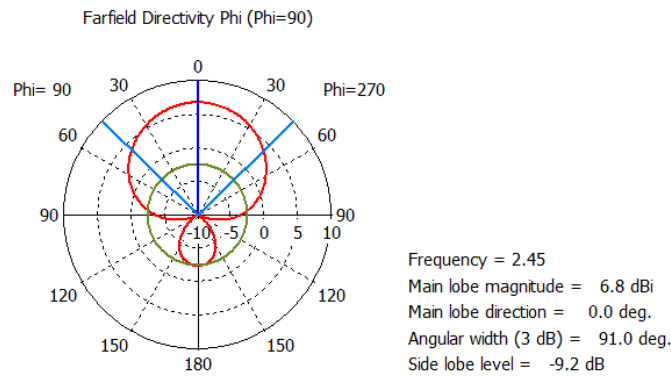


Fig 3 . Polar plot

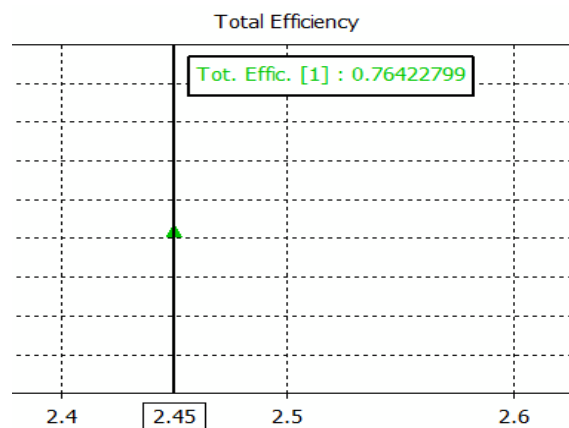


Fig 3 . Graph of Efficiency

### III. APERTURE COUPLED MICROSTRIP ANTENNA WITH METAMATERIAL

Complementary Split Ring Resonator (CSRR) structures with Double Negative (DNG) are represented as Met material. Fig. 5 illustrates a single structure of CSRR.


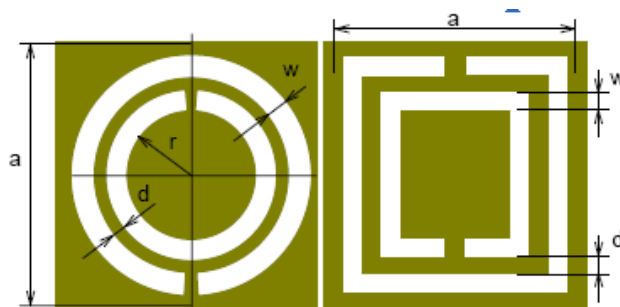


Fig 4. CSRR unit cell structure


Now CSRR structure is used in the ground to make it a metamaterial. The square CSRR structures are added in the ground to form the metamaterial which is shown in the fig 6. CSRR structure evolves both electric and magnetic resonance which depends on the gap between the incident electric and magnetic field [4]. The gap of the inner ring and outer ring are opposite to each other which results in to the capacitive coupling.

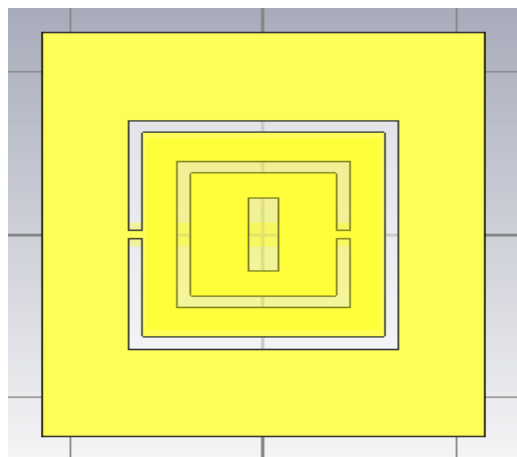


**Fig 6. Metamaterial Microstrip patch antenna**

The above design's simulations is done using CST. And after simulating the designs the result which we got are as follows.


Fig. 7 shows plots of S11 at -10.93db obtained at frequency 2.441 GHz. Also fig. 8 and fig. 9 shows the simulated results of polar plot and efficiency. From the simulated results we can see that the enhancement is observed regarding the parameters like reflection coefficient, polar plot and efficiency.

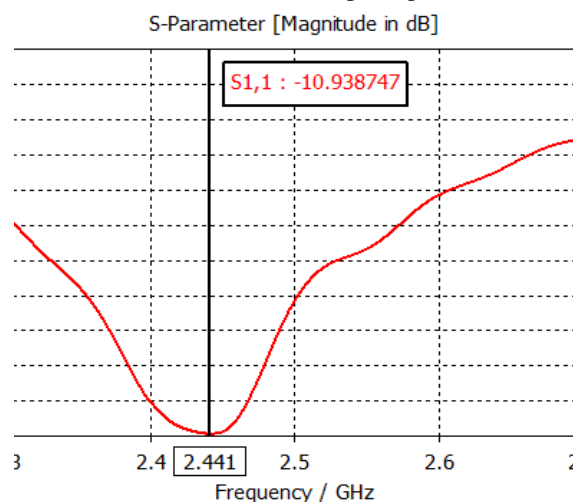

**Fig 7 . Graph of S11 using Metamaterial**

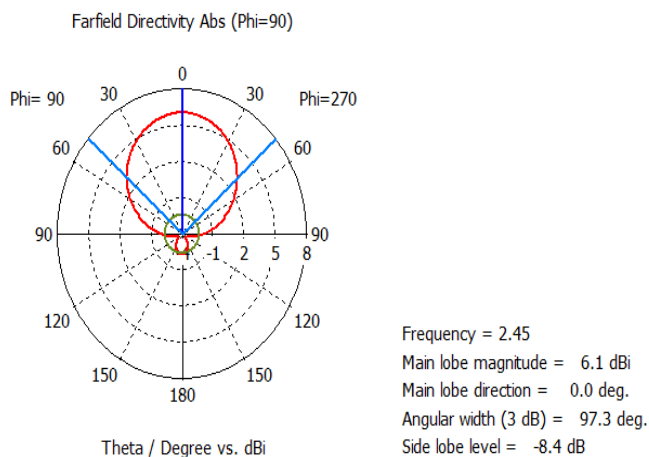

**Fig 8 . Graph of Polar plot**

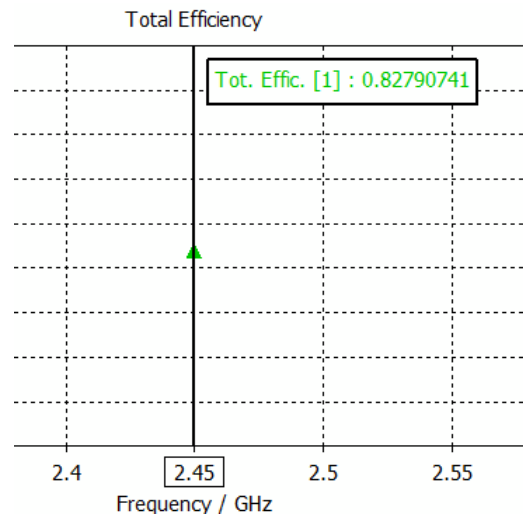

**Fig 9 . Graph of Efficiency**

#### IV. CONCLUSION

Finally comparing the simulations results of the aperture coupled with and without metamaterial we can say that the performance of the aperture coupled antenna has been improved using metamaterial. The efficiency of the aperture coupled antenna has increased from 76.4% to 82.79% using metamaterial structure. An improvement of 6.39% efficiency is achieved using metamaterial. So, aperture coupled using metamaterial is preferable for attaining high efficiency in microstrip patch antenna.

#### REFERENCES

- [1]. Kumar, and K.P. Ray, "Broadband Microstrip Antennas," *Artech House, Inc. 2003*.
- [2]. C. A. Balanis, 'Wiley Interscience' 3<sup>rd</sup> edition
- [3]. D. M. Pozar, "Microstrip G. antenna coupled to a microstrip-line," *Electron.Lett., vol. 21, no. 2, pp. 49-50, Jan. 1985*.
- [4]. S. K. Patel & Y. P Kosta , 'S- Shape Meandered Microstrip Patch Antenna Design using Metamaterial' *Antenna and Wave Propagation, 2014*
- [5]. Christophe caloz and Tatsuo itoh, "electromagnetic metamaterials transmission line theory and microwave application"
- [6]. Shridhar E. Mendhe & Yogeshwar Prasad Kosta, 'Metamaterial properties and applications' *International Journal of Information Technology and Knowledge Management, January-June 2011, Volume 4, No. 1 pp. 85-89* Parth Bhasker & Mohit Joshi "Effect of Metamaterial using Aperture coupled Microstrip Patch Antenna" *IJFTER Volume 2, Issue 2, February-2015*.