

Fabrication and Mechanical Properties of Iron Slag Matrix Composite Materials

Ch.Ramesh¹, N.Jeevan Kumar², Malaga.Anil Kumar³

¹PG Student, M. Tech (CAD/CAM), Holy Mary Institute of Technology & Sciences, Hyderabad

²professor&Head, Department of Mechanical Engineering, Holy Mary Institute of Technology & Sciences, Hyderabad,

³Assistant Professor, Department of Mechanical Engineering, PACE Institute of Technology & Sciences, Ongole,

Abstract:–The objective of present work is to use this industrial waste i.e. Slag as particulate filler material to the epoxy matrix composites by molding technique with different weight fractions (0%, 5%,10%,15%, 20%) to study the mechanical behaviour of reinforced polymer composite material. The change in weight is studied for Slag under different tests like, tensile, bending and impact for obtaining the result. The conclusion helps us to predict the mechanical behavior of various constituents of Slag had resulted in better mechanical properties. The composite can be regarded as a useful light weight engineering material.

I. INTRODUCTION

The first uses of composites date back to the 1500s B.C. when early Egyptians and Mesopotamian settlers used a mixture of mud and straw to create strong and durable buildings. Straw continued to provide reinforcement to ancient composite products including pottery and boats. Later, in 1200 AD, the Mongols invented the first composite bow. Using a combination of wood, bone and “animal glue,” bows were pressed and wrapped with birch bark. These bows were extremely powerful and accurate.

Composite materials are engineering materials made from two or more constituent materials with significantly different physical or chemical properties which remain separate and distinct on a macroscopic level within the finished structure. A composite material is a microscopic or macroscopic combination of two or 22more distinct materials with a recognizable interface between them. A Composite in engineering sense is any materials that have been physically assembled to form one single bulk without physical blending to foam a homogeneous material. The resulting material would still have components identifiable as the constituent of the different materials.

A common example of a composite is concrete. It consists of a binder (cement) and reinforcement (gravel). Adding reinforcement (rebar) transforms concrete into a three-phase composite .The individual materials that make up composites are called *constituents*. Most composites have two constituent materials: a binder or *matrix*, and reinforcement. The reinforcement is usually much stronger and stiffer than the matrix, and gives the composite its good properties. The matrix holds the reinforcements in an orderly pattern. Because the reinforcements are usually discontinuous, the matrix also helps to transfer load among the reinforcements.

PREPARATION OF SAMPLES:

The Samples are prepared by reinforcing the pig iron slag to unsaturated polyester resin to improve the mechanical properties of resin. The industrial waste is collected from LANCO pig iron industry at Srikalahasti. Various ingredients are added to the solution in order to improve the bonding properties and strength of the pure resin.

Major ingredients:

- i. Resin – Unsaturated polyester and Epoxy
- ii. Catalyst – ketone peroxide
- iii. Hardener – cobalt (Accelerater)
- iv. Powder –slag.

II. THE PROPERTIES OF THESE INGREDIENTS ARE

A. Resin:

Polyester resins are unsaturated resins formed by the reaction of dibasic organic acids and polyhydric alcohols. Polyesters resins are used in sheet moulding compound, bulk moulding compound and the toner of

laser printers. Unsaturated polyesters are condensation polymers formed by the reaction of polyols (also known as polyhydric alcohols), organic compounds with multiple alcohol or hydroxy functional groups. Typical polyols used are glycols such as ethylene glycol. Acids used are phthalic acid and maleic acid. Water, a by-product of esterification reactions, is continuously removed, driving the reaction to completion. The use of unsaturated polyesters lowers the viscosity of the resin. Polyester resins are thermosetting and, as with other resins, cure exothermically. The use of excessive catalyst can, therefore, cause charring or even ignition during the curing process. Excessive catalyst may also cause the product to fracture or form a rubbery material.

B. Catalyst:

Methyl ethyl ketone peroxide (MEKP) is an organic peroxide, a high explosive similar to acetone peroxide. MEKP is a colorless, oily liquid whereas acetone peroxide is a white powder at STP; MEKP is slightly less sensitive to shock and temperature, and more stable in storage. Dilute solutions of 30 to 60% MEKP are used in industry and by hobbyists as the catalyst which initiates the polymerization of polyester resins used in glass-reinforced plastic, and casting. For this application, MEKP is dissolved in dimethyl phthalate, cyclohexane peroxide, or diallyl phthalate to reduce sensitivity to shock. Benzoyl peroxide can be used for the same purpose. MEKP is a severe skin irritant and can cause progressive corrosive damage or blindness.

C. Cobalt:

Cobalt-based catalysts are also important in reactions involving carbon monoxide. Steam reforming, useful in hydrogen production, uses cobalt oxide-base catalysts. Cobalt is also a catalyst in the Fischer-Tropsch process, used in the conversion of carbon monoxide into liquid fuels. The hydroformylation of alkenes often rely on cobalt octacarbonyl as the catalyst, although such processes have been displaced by more efficient iridium- and rhodium-based catalysts, e.g. the Captive process.

The hydrodesulphurization of petroleum uses a catalyst derived from cobalt and molybdenum. This process helps to rid petroleum of sulfur impurities that interfere with the refining of liquid fuels.

D. Slag composition:

SiO ₂	19.95%
Al ₂ O ₃	0.57%
CaO	32.40%
MgO	9.80%
FeO	0.32%
MnO	0.45%
Fe ₂ O ₃	34.40%
SiO ₂	19.95%

. Table: 1

E. Special Features:

- Improves adhesion
- Creates physico-chemical bond with inorganic substrates
- Increases tensile strength and modulus of composites
- Increases flexural strength and modulus of composites
- Increases compressive strength of composites

F. Properties

Characteristic	Test Method	Unit	Specification
Appearance	Visual		Clear Liquid
Viscosity at 25°C	ASTM-D 445	M Pa	< 10
Density at 25°C	ASTM-D 4052	g/cc	1.05 - 1.09
Flash Point	ASTM-D 93	°C	122
Storage life		Years	1
Boiling point			120 ⁰ C
Refractive Index			1.428 – 1.43

Table: 2

G. Method of preparation For Polyester

Sample	Resin	Catalyst	Accelerator	Flue dust/Sludge/Slag
Pure resin	96%	2%	2%	0
5%	91%	2%	2%	5%
10%	86%	2%	2%	10%
15%	76%	2%	2%	15%

Table: 3

(a) The polymer matrix composites are made by simple casting technique. In which the Resin is mixed with Industrial Waste Like slag which is collected from the LANCO Pig Iron industry at Srikalahasthi. The Industrial Waste is mixed at different proportions as 5% ,10%, 15% and 20%. The catalyst is added at 2% in order to increase the reaction. The hardener is also added in 2% for proper reaction. The remaining is unsaturated polyester resin. All these ingredients are thoroughly stir by hand and then poured in the mould cavity.

(b) The samples are prepared for different types of tests such as tensile, flexural and iM Pact.

(c) The mould is prepared on smooth ceramic tile with rubber shoe sole to the required dimension. Initially the ceramic tile is cleaned with shellac (NC thinner) a spirituous product to ensure clean surface on the tile. Then mould is prepared by keeping the rubber sole on the tile. The gap between the rubber and the tile is filled with mansion hygienic wax. A thin coating of PVA (polyvinyl alcohol) is applied on the contact surface of the specimen, using brush. The resulting mould is cured for 24 hours. The mixture is prepared as per the above mentioned percentage and poured into the mould.

(d) This is left for solidification for 24 hours and then removed from the sheet.

(e) The specimens are post cured at 50⁰C for 2hrs in oven

H. Testing Of Specimens

The specimens prepared are subjected to 3 types of tests

- 1) Tensile test – Uniaxial tensile test
- 2) Bending test – 3-point flexural test
- 3) IM Pact test – V- notched iM Pact test

I. Density of composite:

In order to find the density of the composites we have to find the volume of the composites using Archimedes principle.

Take a graduated flask and fill it with water without air bubbles, up to a level (say 100ml). Now immerse the specimens (having same weight of fiber) into the water. Now the water is displaced to some extent and the water level in the flask is noted. The difference between the two levels gives the volume of the composites. Now average volume of each composite is calculated. The weights of all composites are noted using a digital weighing balance of 0.01gms least count. The average mass of each composite is then calculated.

$$\text{Density of composite} = \frac{\text{Average weight of each composite}}{\text{Average volume of each composite}}$$

% weight Particulate	0 (Pure)	5	10	15	20
Elongation	Load (N)				
0.0	0	0	0	0	0
0.1	44.88075	24.525	52.4835	55.67175	59.59575
0.2	54.20025	38.259	75.29175	71.1225	80.9325
0.4	82.64925	78.23475	107.6648	90.98775	111.834
0.6	113.550	117.229	133.1708	137.34	155.7338

	8	5			
0.8	131.944 5	147.15	169.4678	166.77	199.3883
1.0	168.241 5	178.051 5	216.0653	199.6335	259.965
1.2	207.236 3	213.612 8	262.908	239.8545	351.198
1.4	260.946	277.132 5	316.1273	278.3588	451.9958
1.6	346.293	348.500 3	393.8715	316.863	559.17
1.8	417.906	428.187 5	477.0113	359.046	692.8313
2.0	519.93	530.230 5	572.903	416.6798	797.7983
2.2	631.764	621.708 8	659.9678	479.4638	916.9898
2.4	727.166 3	710.489 3	748.0125	536.607	1020.485
2.6	831.397 5	778.668 8	832.6238	577.809	1085.313
2.8	932.685 8	871.373 3	903.9915	615.8226	1162.485
3.0	1013.65 8	950.098 5	969.9638	642.555	1233.444
3.2	1079.83 6	1042.80 3	1013.618	671.2493	1445.994
3.4	1142.37 5	1115.64 2	1049.67	702.6413	
3.6	1206.63	1167.39	1081.798	721.035	
3.8	1297.37 3	1205.97 6	1105.587	745.805	
4.0	1334.16	1257.64 2	1138.451	752.1	
4.2	1354.10 7			777.606	
4.4	1388.44 2			781.857	
4.6	1436.18 4			786.762	
4.8	1434.22 2			790.686	

Table: 4

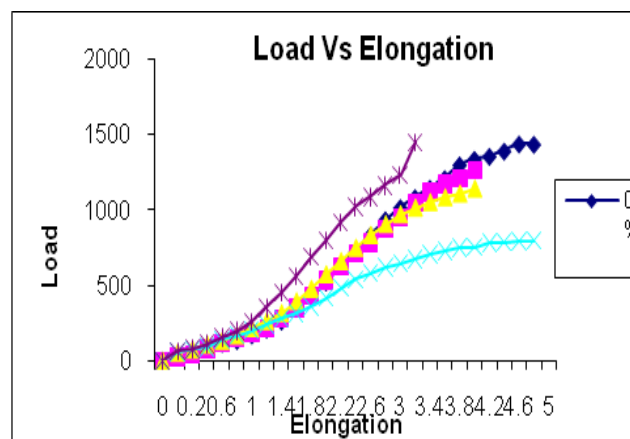


Fig:1. Load vs Elongation of Slag for Epoxy Resin

J. Load Vs Elongation of Slag for Polyster

The tensile load versus elongation curve of Slag specimens is shown in fig 5.1. For pure particulate specimen as the load increases the elongation also increases gradually. It reached the peak at a load of 751.4460 N with a elongation of 3mm. For 5% particulate weight as the load increased the elongation also increased but the rate of deflection is slightly more than pure specimen. It reached the peak at a load of 808.1478 N. For 10% particulate weight as the load increased the elongation also increased but the rate is greater than 15% particulate specimen, it reached the peak at a load of 1167.390 N with a elongation of 3 mm. For 10% particulate weight specimen the variation of the curve is similar to 20% particulate weight but it reached the peak at a load of 1056.79 N with a deflection of 2.4mm

% weight Particulate	0 (Pure)	5	10	15	20
Elongation		Load (N)			
0.0	141.7545	108.1062	97.90380	123.606	109.7815
0.1	168.4657	155.9098	177.1595	182.732	185.9786
0.2	197.6780	189.5292	193.4532	221.1174	187.1963
0.4	243.5332	226.8072	259.7688	283.3128	225.908
0.6	283.2637	281.9394	337.4640	374.5458	276.781
0.8	336.4830	333.3438	403.7796	461.2662	381.5167
1.0	390.1940	394.7544	517.5756	573.2964	473.501
1.2	437.7710	445.3740	634.7070	688.0734	499.259
1.4	480.9352	494.2278	754.7814	792.0594	548.913
1.6	518.9490	555.0498	870.7356	840.7170	625.458
1.8	548.3750	613.7136	961.5762	911.0220	711.714
2.0	587.8642	664.7256	1045.157	888.7860	825.668
2.2	627.3495	704.9466	1103.428		917.931
2.4	659.7225	737.3196	1154.637		1056.79
2.6	679.5878	762.2370	1191.130		
2.8	724.3040	785.7810	1142.211		

Table:5 Load vs Elongation of slag for Polyster

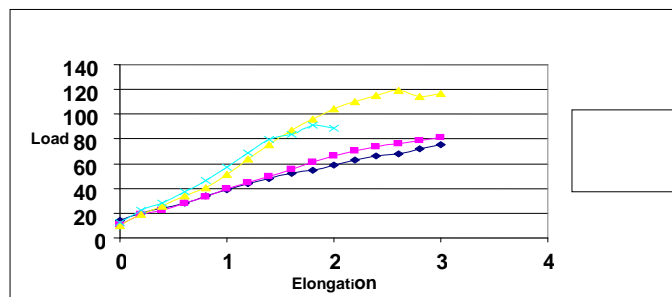


Fig:2.

Tensile Strength Vs Percentage Weight of Slag:

The tensile strength versus percentage weight of Slag is shown in the fig 5.3. There is an increase in the graph which reached a maximum value at 20%. The value of tensile strength at 5% weight of particulate is 33.53MPa and there is an increase in the tensile strength at 10% weight of particulate to a value of 30.35MPa. The increment in the tensile strength has later decreased at 15% weight of particulate to an amount of 31.08MPa. The tensile strength at 20% weight of particulate to an amount of 38.55 Mpa. The values of the tensile strength and the percentage weight is given in the table 6

percentage wt of Slag	0%	5%	10%	15%	20%
Tensile strength(Mpa)	38.2	33.53	30.35	31.08	38.55

Table:6. Tensile Strength Vs Percentage Weight of Slag:

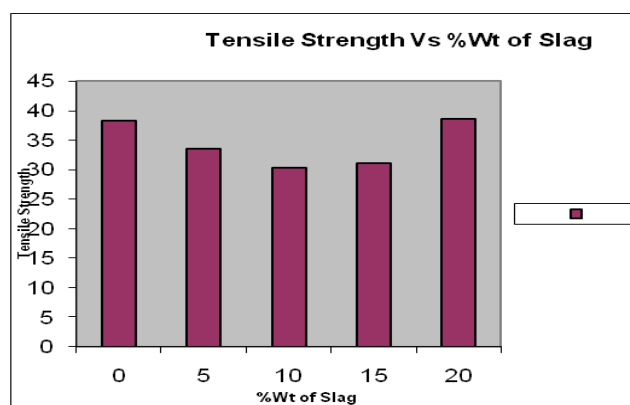


Fig:3 Tensile Strength Vs Percentage Weight of Slag:

K. Tensile Modulus Vs Percentage Weight of Slag

The tensile modulus versus percentage weight graph of Slag is shown in the figure 5.4. The tensile modulus reached maximum value at 20% and minimum value at 10%. The value of tensile modulus at 20% weight of slag is 602.34 MPa. The tensile modulus value decreased at 10% weight of slag to a value of 379.375MPa and there is again an decrease in the value at 5% and 15% weight of slag to a value of 419.12 MPa. The values of tensile modulus and the percentage weight of slag is shown in the table 7.

percentage wt of Slag	0%	5%	10%	15%	20%
Tensile modulus(Mpa)	397.916	419.12	379.375	419.58	602.34

Tab7 : Tensile Modulus Vs Percentage Weight of Slag

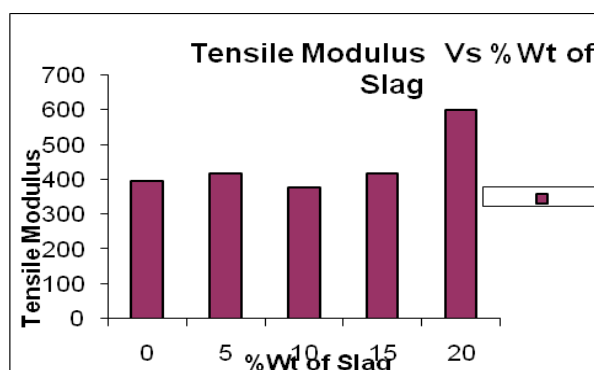


Fig:4. Tensile Modulus Vs Percentage Wt of Slag

Specific Tensile Strength Vs Percentage Weight of Slag

percentage wt of Slag	0%	5%	10%	15%	20%
Sp Tensile strength(Mpa/kgm-3)	0.026	0.0244	0.0218	0.0153	0.0255

Tab 8 : Specific Tensile Strength Vs Percentage Weight of Slag

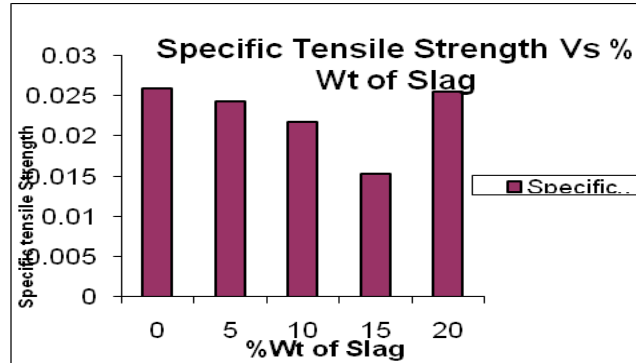


FIG 5.: Sp. Tensile Strength Vs Percentage Wt of Slag

Flexural Strength Vs Percentage Wt of Slag:

The flexural strength versus percentage weight of Slag is shown in the figure 5.7. The flexural strength reached a maximum value at 20%. The flexural strength at 20% weight of lime sludge is 104.3784 MPa. The flexural strength at 15% weight of slag is 88.145 Mpa. The flexural strength at 10% weight of slag is 83.205Mpa. The values of flexural strength and percentage weight of Slag is given in table

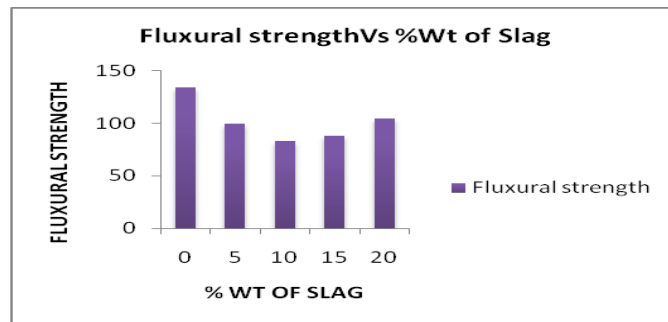


Fig:6. Flexural Strength Vs Percentage Wt of Slag

Specific Flexural Strength Vs Percentage Weight of Slag

percentage wt of Slag	0%	5%	10%	15%	20%
SpTensile strength(Mpa/kgm-3)	0.1114	0.0741	0.0615	0.0681	0.0759

Tab: 9. Specific Tensile Strength Vs Percentage Weight of Slag

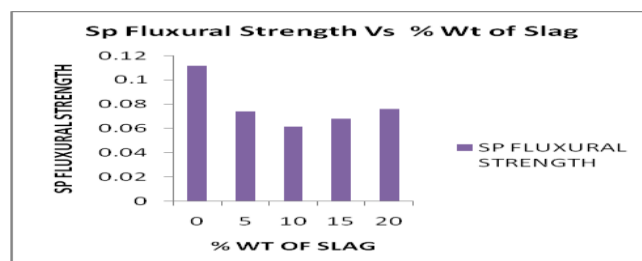


Fig: 7. Specific Tensile Strength Vs Percentage Weight of Slag

Impact strength Vs Percentage Weight of Slag

percentage wt of Slag	0%	5%	10%	15%	20%
Impact strength(Nm/mm2)	0.0017	0.0021	0.002	0.0045	0.0076

Tab: 10. Impact strength Vs Percentage Weight of Slag

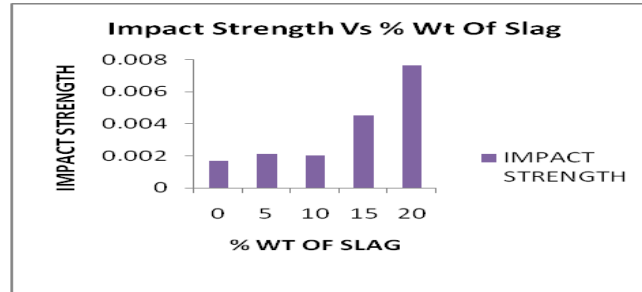


Fig: 8. Impact strength Vs Percentage Weight of Slag

Tensile Strength Vs Percentage Weight of Slag

percentage wt of Slag	0%	5%	10%	15%	20%
Tensile strength for (Epoxy)	38.2	33.53	30.35	31.08	38.55
Tensile strength for (Polyster)	15.96	27.12	23.156	28.45	31.763

Tab: 11. Tensile Strength Vs Percentage Weight of Slag

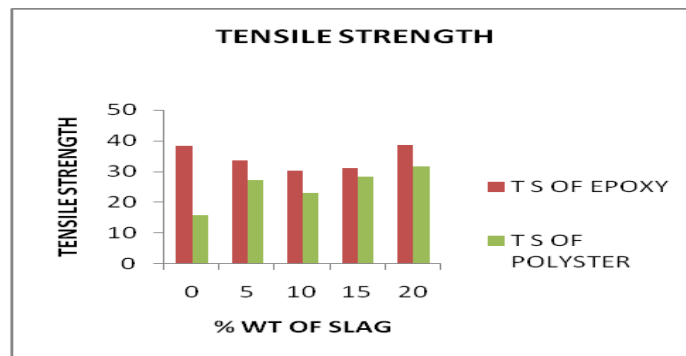


Fig: 9. Tensile Strength Vs Percentage Weight of Slag

Specific Flexural Modulus Vs Percentage Weight of Slag

percentage wt of Slag	0%	5%	10%	15%	20%
SpFlexuralModulus(Epoxy)	2.7281	2.367	1.904	2.345	2.417
SpFlexuralModulus(Polyster)	2.44516	2.281	2,2508	2.301	1.936

Tab: 12. Specific Flexural Modulus Vs Percentage Weight of Slag

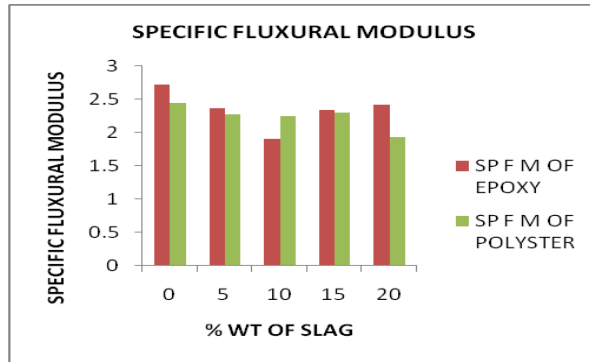


FIG10: Specific Flexural Modulus Vs Percentage Wt of Slag

Impact strength Vs Percentage Weight of Slag

percentage wt of Slag	0%	5%	10%	15%	20%
Impact strength(Epoxy)	0.0017	0.0021	0.002	0.0045	0.0076
Impact strength(Polyster)	0.0022	0.0018	0.0011	0.0034	0.0052

Tab: 13. Impact strength Vs Percentage Weight of Slag

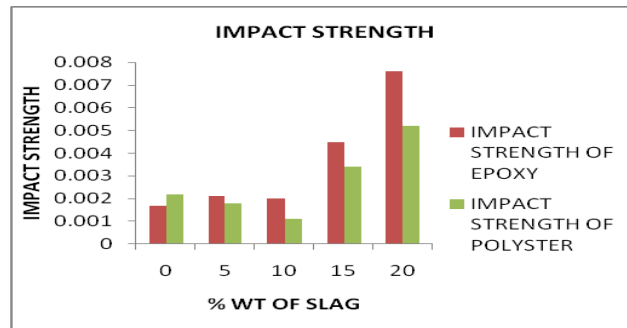


FIG11: Impact strength Vs Percentage Weight of Slag

E-glass epoxy

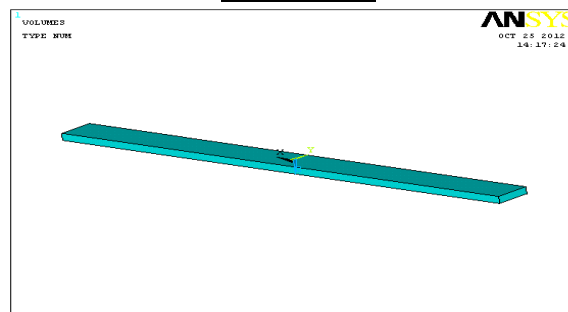


Fig: 12 The above image is imported from Pro-e to Ansys using IGES (Initial Graphical Exchange Specification) format

Meshed model:


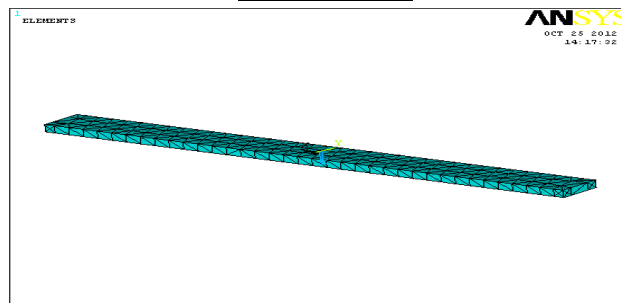


Fig: 13 The above image is showing meshing is used to divide the problem into number of small problems and also to apply the material and element properties

Loads applied

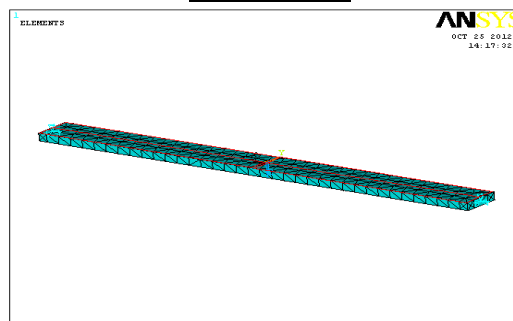

. Fig: 14 loads acting on spring

Displacement:

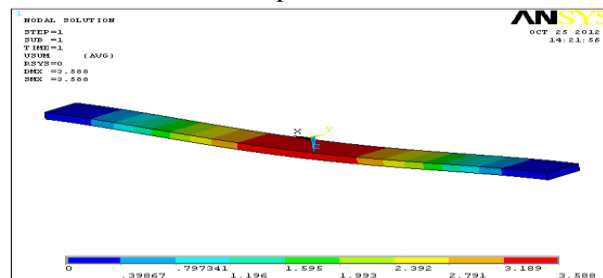


Fig: 15 The above image is showing distributed shape or variation of geometry shape after applying loads. The maximum displacement is 3.588 mm.

Von-Mises Stress:

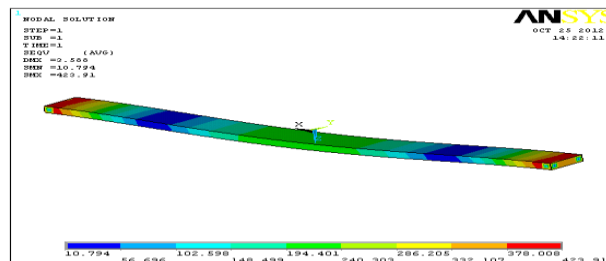


Fig: 16 The above image is showing vonmises stress value. Vonmises stress depends on vonmises theory of failure.
E-glass with 20% iron

Displacement:

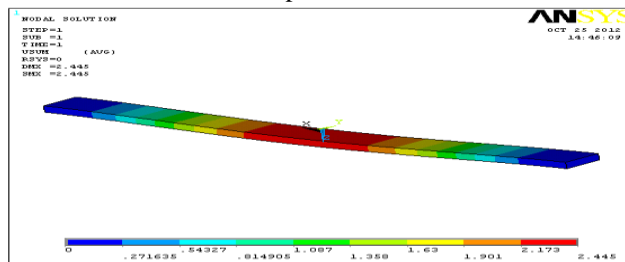


Fig: 17 The above image is showing distributed shape or variation of geometry shape after applying loads. The maximum displacement is 2.445 mm

Von-mises stress:

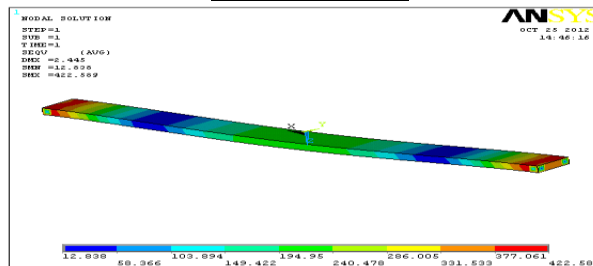


Fig: 18 the above image is showing vonmises stress value. Vonmises stress depends on vonmises theory of failure.

S-glass epoxy:

Displacement:

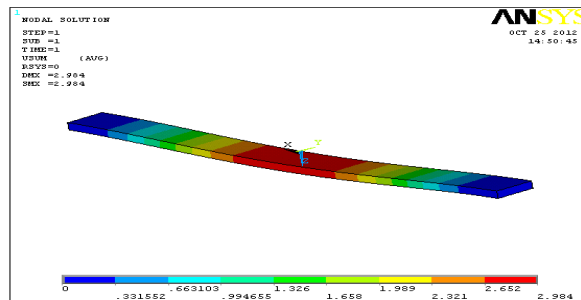


Fig: 19 The above image is showing distributed shape or variation of geometry shape after applying loads. The maximum displacement is 2.984 mm.

Von-mises stress:

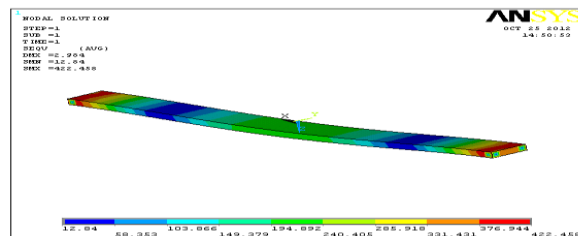


Fig: 20 The above image is showing vonmises stress value. Vonmises stress depends on vonmises theory of failure.

S-glass epoxy with 20% iron:

Displacement:

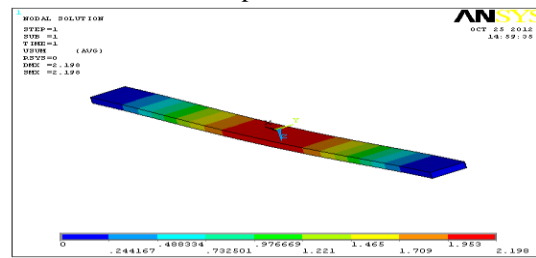


Fig: 21 The above image is showing distributed shape or variation of geometry shape after applying loads. The maximum displacement is 2.199 mm.

Von-mises stress:

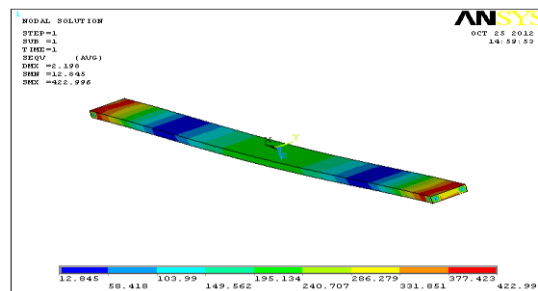


Fig: 22 The above image is showing vonmises stress value. Vonmises stress depends on vonmises theory of failure.

By observing the above results we conclude that s-glass with 20% iron is better.

III. CONCLUSION

Tensile, Flexural and impact tests are conducted on specimen in different compositions of Slag for epoxy and polyster. From the tensile and flexural test young's modulus of the specimen for different compositions are calculated. It can be observed that the young's modulus of the specimen get improved by reinforcing **Slag**.

❖ There is an increase in tensile and flexural properties up to 20% by reinforcing slag..

❖ Impact properties gradually decreased by increase in weight of Slag.

By using the mixture of cement and Slag as a reinforcing material the mechanical properties of the specimen increased.

SCOPE FOR FUTURE EXPERIMENTATION

- Cement can be varied in different proportions for improving the mechanical properties of the specimen.
- Some other particulates like granite powder or any other industrial waste can be added for improving the mechanical behaviour
- The impact strength can be raised by improving the fineness of the particulate powder.
- Other tests like wear resistance test, die electric test can also be conducted to study mechanical behaviour.

REFERENCES

- [1]. Alok Satapathy, Amar patnaik, "Analysis of dry sliding behavior of red mud filled polyester composites using taguchi method"
- [2]. Pongdhorn sae-oui , Chakrit Sirisinha , Uthai Thepsuwan , kannika Hattapanit. "Roles of Silane coupling agents on properties of silica filled polychloroprene"
- [3]. P.Mareri, S.Bastide, N.Binda, & A.Crespy "Mechanical behavior of poly propylene composites cantaining fine mineral filler: effect of filler surface treatment"
- [4]. H. Weibeck, D.F. borrely, C. Xavier, "The effect of silane coupling agent on a composite polyamide-6/talc", Barz. J. Chem, Eng. Vol. 15 n.4 Sao Paulo Dec 1998.
- [5]. T. Chaowasakoo, N. Sombatsompop, " Mechanical and morphological of fly/epoxy composites using conventional thermal and microwave curing methods", composites science and technology 67(2007) 2282-2291.

- [6]. Soon-Chul Kwon, Tadaharu Adachi, Wakako Araki, Akihiko Yamaji, “ Effect of composing particles of 2 sizes on mechanical properties of spherical silica-particulate reinforced epoxy composites”.
- [7]. K. Zhu, S. Schmauder, “ Prediction of failure properties of short fiber reinforced composites with metals and polymer matrix”.
- [8]. I.H. Tavman, “ Thermal and mechanical properties of copper powder filled poly(ethylene) composites”.
- [9]. H. Ku, W. Jacobson, M. Trada, F. Cardona, D. Rogers “ Tensile tests of formaldehyde SLG reinforced composites: Pilot study”, journal of composite materials, vol.42, No.26/2008.
- [10]. S.F. Hassan and M. Gupta “ Effect of Nano-ZrO₂ particulates reinforced on microstructure and mechanical behavior of solidification processed elemental Mg”, journal of composite material, Vol.41, No. 21/2007.
- [11]. V. Alvarez, A. Vazquez and O. De La Osa, “ Cyclic Water Absorption Behavior of Glass-vinylester and glass-epoxy composites”, journal of composite materials, Vol.41, No. 10/2007.
- [12]. M.A. Aboudzadeh. S.M. Mirabedini, M. Atai, “ Effect of silane based treatment on the adhesion strength of acrylic lacquers on the PP surfaces”.
- [13]. Pongdhorn Sae-oui, Chakrit Sirisinha, Uthai Thepsuwan, Kannika Hatthapanit “ Roles of silane coupling agents on properties of Silica- filled Polychloroprene”
- [14]. H.F.Wu, D.W.Dwight & N.T.Huff “ Effects of silane coupling agents on the interphase and performance of glass- fiber reinforced polymer composites.